MITSUBISHI HEAVY INDUSTRIES

HVO

MITSUBISHI MARINE ENGINE

S6R2-MPTA

485–595 kW | Marine Generator

Not Regulated

Reliable mechanical engine



ENGINE DATA			
Engine model	S6R2-MPTA	**Method of operation**	6-cylinder, 4-stroke, water-cooled diesel engine, with direct-injection, turbocharger and air-cooler
Cylinder configuration	6 in-line		
Bore × stroke (mm)	170 x 220		
Total displacement (l)	29.96		
Compression ratio	14.0:1	**Cooling method**	single cooling circuit; charge air cooler integrated in jacket water system (aftercooler)
Flywheel and housing	SAE 18 / SAE 00		
Dry weight (kg)	2910		
Aspiration	Turbocharged and after-cooled		

RATING [1,2]		
Application	Generator	
Duty Class	Prime	Prime
Output (kW)	485	595
Output (bhp)	650	797
Engine speed (rpm)	1200	1500
Gross torque (Nm)	3930	3860
Fuel consumption 100% load (g/kWh)[3]	194	220
Fuel consumption 75% load (g/kWh)[3]	200	237
Fuel consumption 50% load (g/kWh)[3]	213	227
Average fuel consumption (l/h)[3]	57.9	77.9
Emissions	Not Regulated	

1 For rating definitions, please see our website.

2 Atmospheric condition: barometric pressure: 100 kPa, ambient temperature: 298 K, relative humidity: 30%.

3 Fuel consumption is based on ISO3046/1 with +5% tolerance at rated power, weighing 836 g/liter and a LHV of 42,780 kJ/kg, excluding pump. Average fuel consumption recommended by ISO8178 (E3 standard test cycle for propulsion application FPP).

© Mitsubishi Turbocharger and Engine Europe B.V.
This specification may be revised without prior notice.
All pictures shown are for illustration purpose only.
Version: 04-11-2026

MOVE THE WORLD FORWARD MITSUBISHI HEAVY INDUSTRIES GROUP

STANDARD EQUIPMENT

FUEL SYSTEM
- Flexible fuel supply - and return hoses
- Fuel feed pump
- Fuel fine filters, change-over type
- Fuel injection pump
- Dual walled high-pressure fuel lines
- Fuel injectors

LUBRICATING OIL SYSTEM
- Wet type oil pan with inspection covers
- Oil pressure pump, gear driven
- Lubricating oil filters, change-over type
- By-pass filter
- Oil cooler with thermostat

STARTING AND ELECTRICAL SYSTEM
- Electric starter (Earth floated 24V)
- Alternator, 30 Amps.
- Stop solenoid (ETS)

COOLING SYSTEM
- Fresh water pump including piping and thermostat (HT)
- Front pulley PTO standard

AIR INLET SYSTEM
- Mitsubishi turbocharger
- Air inlet silencer with pre-cleaner
- Inlet air aftercooler or intercooler
- Inlet manifolds or ducts

EXHAUST SYSTEM
- Stainless steel insulation (SOLAS)

OTHER
- Mounting brackets for rigid mounting
- Flywheel and housing, SAE standard
- Torsional vibration damper

OPTIONAL EQUIPMENT

CERTIFICATION / CLASSIFICATION
- Available in cooperation with major classification societies.

GOVERNOR (MANDATORY)
- Hydraulic governor
- Electronic governor, with speed control box

FUEL SYSTEM
- Drip tray fuel filters


LUBRICATING OIL SYSTEM
- Drip tray oil filters
- Lubricating oil drain pump
- Pre-lubrication oil system

MONITORING SYSTEM
- Complete digital monitoring system
- Sensor package; sensors mounted on engine with terminal box

COOLING SYSTEM
- Cooling system with fresh water pump V-belt including piping (LT) without thermostat (LT)
- Cooling water heater with circulation pump
- Heat exchanger and seawater pump

EXHAUST SYSTEM
- Flexible expansion joint

DIMENSIONS

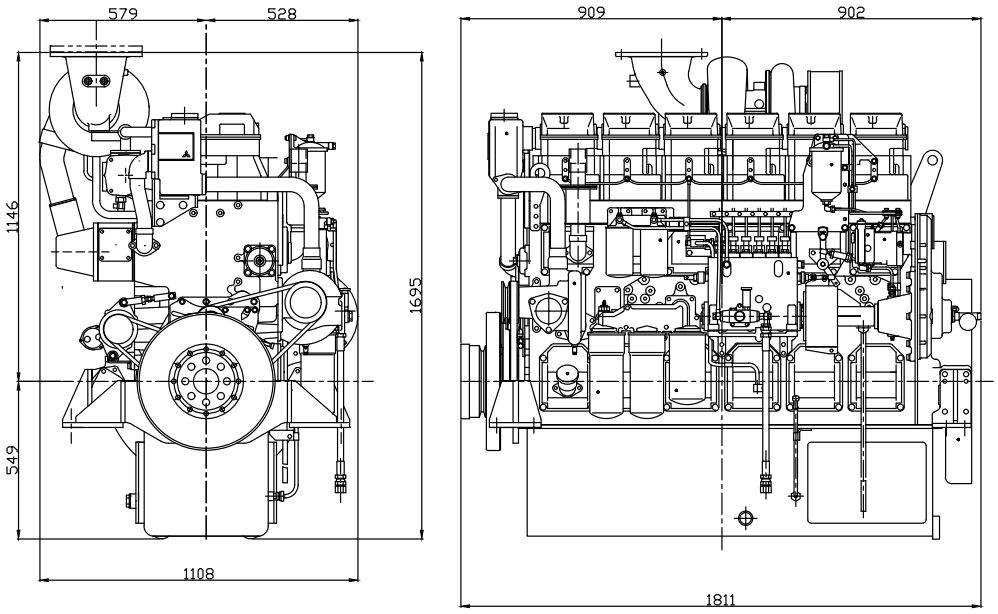

More information

Contact your local dealer for more information regarding Mitsubishi Marine Engines and optional equipment or, visit **engine-genset.mhi.com**

© Mitsubishi Turbocharger and Engine Europe B.V.
This specification may be revised without prior notice.
All pictures shown are for illustration purpose only.
Version: 04-11-2026

MOVE THE WORLD FORWARD